




CLAMPING SYSTEM X-CLAMP 3858

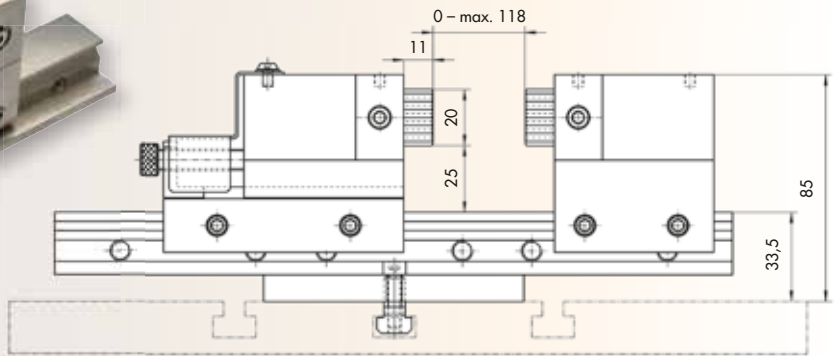

» Easy and safe clamping of various workpieces

» Modest effort through mechanical power transmission

CLAMPING SYSTEM X-CLAMP 3858

- » Individual and safe clamping of various smaller specimen shapes and sizes with spring suspended stainless steel plungers
- » Perfect form fit with minimal effort
- » Time-saving
- » Incl. torque wrench

Order No. Z2234010

- » Clamping process:
- » The spring suspended plungers fit tightly to the specimen
- » Fix the plungers
- » Apply clamping force via spindle

TECHNICAL DATA

Plunger area (WxH)	23x20 mm
Plunger stroke	12 mm
Max. clamping width	118 mm



BASE FOR CLAMPING SYSTEM X-CLAMP 3858

- » Incl. fixing material





Order No. Z2234011

- » For fixation with T-slot nut 12 mm

Order No. Z2234012

- » For fixation with T-slot nut 8 mm

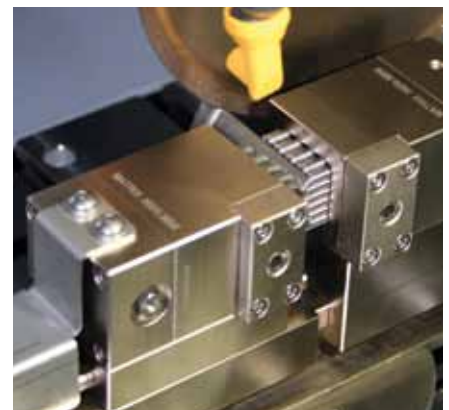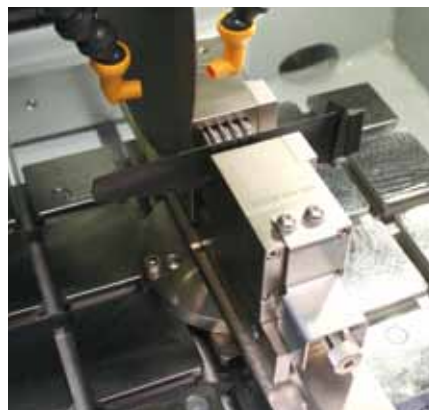



USE WITH EASY-CLAMPING BASE

EASY-CLAMPING BASE

- » for tables with additional slots
- » T-slot 8 mm; range 120 mm (Brillant 220)
- » T-slot 12 mm; range 150 mm (Brillant 230, 250)
- » HxWxD 15x80x200 mm
- » incl. screwdriver with ball head (width 5 mm)

Order No. Z2236008



The innovative easy-clamping system consists of a base plate, which can be fixed quick and easy on the table of the **Brillant 220, 230 and 250** and various additional modules, time-saving adaptable by a quick-clamping system. X-clamp-system can be mounted on the base plate without further accessories.

- » Base for quick and easy fixing and adjusting of various clamping tools on machine table
- » For fixing of: Fast lock vice 80 / 60 / 50
- » X-clamp system 3858

